

VEGA

INFINITI

Ultra Long-Range Multi-Sensor PTZ Camera

The Vega offers the highest level of customization with the ability to integrate various technologies and sensors including ZLID illumination up to 6km, LRFs (Laser Range Finders) rated up to 30km, radar Slew-to-Cue integration for automated tracking, and GPS telemetry. Heavy duty gearing systems ensure that the systems are self-locking even when not in operation. Weatherproof military connectors and corrosion resistant anodized aluminum is available for enclosures, ensuring these systems will stand up to any environment.

Key Features:

- › 15.4-2075mm HD IR-Corrected Zoom Lens (with IZE doubler)
- › 27°-0.2° Horizontal Field of View gives a 135X Zoom Range
- › 550X Zoom Ratio with 110° Wide-Angle Spotter Camera
- › 1280×1024 or 640×480 Cooled Thermal Imager
- › Thermal Lens Options Available with up to 1400mm
- › 125° to 0.39° Thermal HFOV, Depending on Lens and Sensor
- › Optional ZLID™ Illumination for up to 6km of High Definition NIR Imaging in Complete Darkness
- › Endless 360° Rotation Pan/Tilt with Speeds up to 0.001-100°/s
- › Up to 0.00036° Resolution Pan/Tilt with Low Backlash
- › Rugged IP66/67 and -50° to +65°C with Anti-Corrosion Finish

Optional Features:

- › 30km Rated LRF
- › 1280×1024 HD Cooled Thermal
- › HD SWIR Camera
- › GPS & DMC for Accurate Positioning
- › Static Mount
- › Laser Dazzler or Spot/Strobe Light
- › Gyro Stabilization
- › Many Other Customizations Available



Appearance will vary based on configuration options.

15mm-
800
53X 4MP

36mm-
700
MWIR^{HD}

15mm-
800
53X 8MP

70mm-
1015
MWIR^{HD}

1km
ZLID™

10.6mm-
1015
95X 8MP

46mm-
1100
MWIR

2km
ZLID™

2050
mm
8MP

92mm-
1200
MWIR^{HD}

4km
ZLID™

15.4mm-
2075
135X 2MP

85mm-
1400
MWIR

6km
ZLID™

Multiple Zoom
Lens Options
up to 2075mm

Long-Range
Thermal up to
1400mm Zoom

Optional IR
Illumination
up to 6km

Waterproof
with Military
Connectors



Optional Gyro
Stabilization



Optional
InGaAs LRF



View the Vega on our website:

THE VEGA'S Visible/NIR HD Zoom Camera





VIS/NIR Optical Camera

Infiniti's zoom camera modules utilize high-end CMOS sensors to offer excellent spectral sensitivity in the visible and near-infrared wavelengths of light, providing high-quality images optimized for long-range surveillance. They are designed to provide industry-leading performance and quality, with image resolutions ranging from 2MP (1080p HD) to 8MP (4K UHD) and 12MP. Precision engineered IR-corrected continuous zoom lens options offer a range of focal lengths with up to 135X optical zoom and integrated rapid autofocus to allow for long-range surveillance of targets without operator intervention.

Wide Angle Spotters

The Vega PTZ can also support our optional wide angle spotter cameras. By integrating a second high resolution sensor with a wide angle lens, operators can maintain wide area situational awareness while simultaneously achieving detailed surveillance of targets at long ranges.

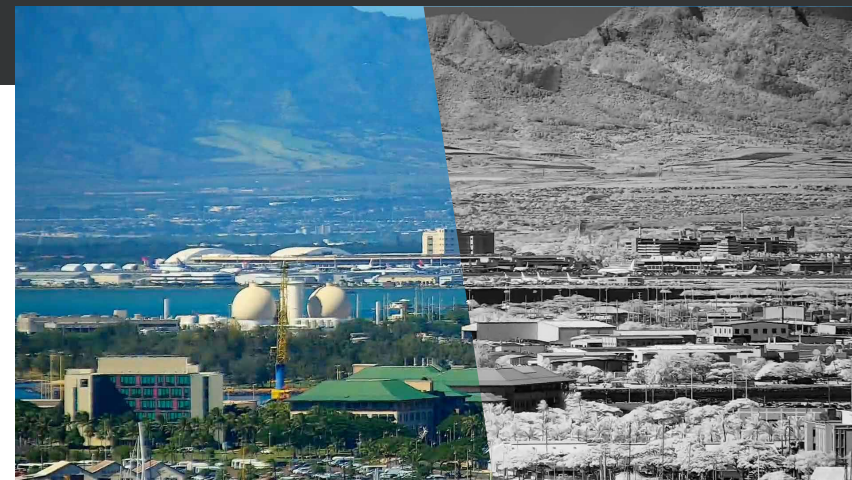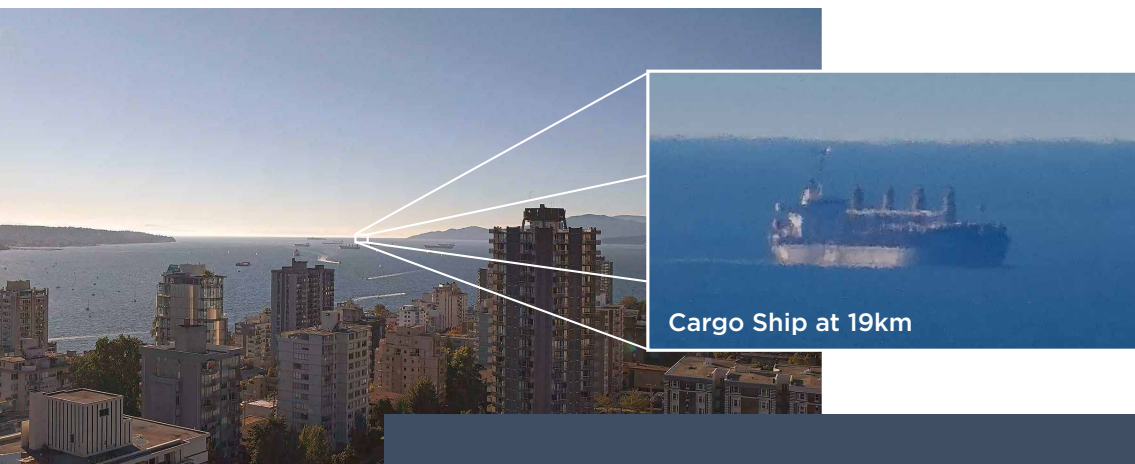

Standard Color Visible Image
(Optical Fog Filter Disabled)

NIR Image
(Optical Fog Filter Enabled)

Optical Fog Filter (NIR Only Mode)

While most surveillance cameras offer a nighttime NIR + visible mode for optimized sensitivity in low light, the Vega's cameras are also equipped with our NIR bandpass filter (also referred to as a "fog filter") allowing users to isolate the NIR (near-infrared) wavelength of light during the day for clearer long-range daytime imaging.

Long-range imaging needs to see through large amounts of atmosphere which often contains particulates like smoke, haze/fog, and other atmospheric distortions. Cutting out the visible wavelength and isolating the NIR can mitigate the effects of smoke, haze and light fog, producing an image with better contrast and less distortion. Our optical fog filter lenses incorporate a motorized filter that is used with the camera's monochrome mode and de-haze image processing to see through smoke, smog and haze.

THE VEGA'S ZLID™ & Thermal Technologies



See in the Dark with ZLID™

IR illumination allows for detailed video when there isn't enough natural light, however common IR LED illuminators have very limited ranges. For long-range illumination, a laser is needed. Many laser illuminators overexpose the center of the screen and leave the edges dark. Infiniti's ZLID (Zoom Laser IR Diode) technology synchronizes the IR intensity and area illumination with the zoom lens for outstanding active IR performance, eliminating over-exposure, washout, and hot-spots for clear images in complete darkness.



See Further with Thermal

The Vega boasts industry-leading thermal cameras with uncooled LWIR and cooled MWIR options from resolution of 384×288 up to 1280×1024 HD to ensure mission success.

Thermal cameras, unlike traditional visible cameras, use heat rather than light to see objects. Humans, animals, and vehicles are all quite hot in contrast to most surroundings, making intruders hiding in shadows or bushes easy to spot. Thermal images are also unaffected by bright lights and can see through atmospheric obstructions such as smoke, dust, and light fog. This makes thermal imaging an ideal technology for many applications including surveillance and security, search and rescue, fire fighting, marine and land navigation, wide area situational assessment, and much more.



THE VEGA'S

Thermal Imaging Options: Cooled vs Uncooled



Uncooled Long Wave Infrared (LWIR)

Infiniti uses cutting-edge 12μm LWIR VOx uncooled thermal sensors with resolutions up to 1280×1024 HD. The 12μm pixel pitch provides a narrower field of view without changing the lens, allowing it to achieve 40% further range than 17μm sensors.

These sensors are paired with large aperture lenses of f/1.0–f/1.3, compared to the standard f/1.5–f/1.6, allowing up to 2.3 times more heat to reach the sensor. This results in higher sensitivity, sharper images, and longer ranges, making LWIR one of the most cost-effective long-range imaging solutions.


Cooled Mid-Wave Infrared (MWIR)

Infiniti offers cooled thermal in SD or HD options. Our 15μm 640×480 InSb or MCT sensors are comparable to the standard MWIR offerings in the industry. Our 10μm 1280×1024 HD X-Hot sensor provides 400% higher resolution and 50% longer range than traditional 15μm sensors. This means a 400mm lens on our X-Hot sensor is equivalent to a 600mm lens on a traditional 15μm sensor allowing it to provide a narrower angle (further zoom) for more detail at long distances.


MWIR sensors use integrated cryo-coolers to cool the sensors down to -196°C (InSb) or -123°C (X-Hot). This exponentially increases the sensitivity of the thermal camera, allowing MWIR cameras to use smaller and more powerful lenses than uncooled LWIR cameras, however the cryo-coolers do require maintenance at intervals that vary depending on sensor type and environment.

Our new **Thermally Compensated Optics (TCO)** technology maintains MTF, back focal distance, and effective focal length across a wide range of operating temperatures. This TCO technology effectively mitigates challenges posed by thermal expansion. Paired with our HD InSb or X-HOT MWIR thermal cores, Infiniti's systems provide high contrast and ultra long distance infrared imaging for mission critical applications such as threat detection, surveillance, auto-tracking and targeting. With lens options capable of detection ratings* over 55km (based on DRI ratings in ideal conditions), the Arc is the ultimate thermal surveillance platform.

Human DRI:

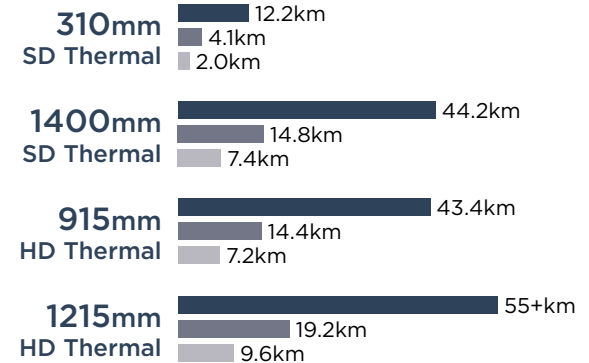

Vehicle DRI:

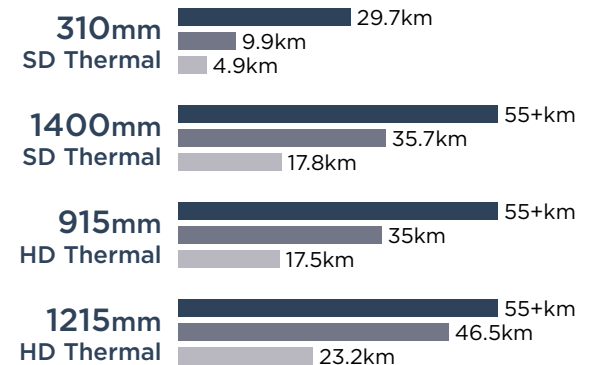

■ **DETECTION***
■ **RECOGNITION***
■ **IDENTIFICATION***

*DRI detection ratings are based on industry-wide standards (Johnson's Criteria) that can be misleading if not properly understood. For more information, please see our whitepaper about understanding DRI measurements at: www.infinitioptics.com/dri

VEGA

Visible/NIR Camera Options



8M-2050TO		2075-LSM		8M-95X		8M-53X		4M-53X	
Simulated FOV @ 1km									
Pixels Per Meter @ 1km		1025ppm		553ppm		508ppm		400ppm	
DORI	D: 25ppm	41,000m Detection		22,133m Detection		20,300m Detection		16,000m Detection	
	O: 62ppm	16,532m Observation		8,925m Observation		8,815m Observation		6,452m Observation	
	R: 125ppm	8,200m Recognition		4,427m Recognition		4,060m Recognition		3,200m Recognition	
	I: 250ppm	4,100m Identification		2,213m Identification		2,030m Identification		1,600m Identification	
Output Resolution		8MP/4K @ 30fps (3840×2160)		2MP/1080p @ 60fps (1920×1080)		8MP/4K @ 30fps (3840×2160)		8MP/4K @ 30fps (3840×2160)	
Image Sensor		8.4 Megapixel 1/1.8" W CMOS		2.0 Megapixel 1/2" W CMOS		8.4 Megapixel 1/1.8" W CMOS		8.4 Megapixel 1/1.8" W CMOS	
Lens*	Focal Length	2050mm		15.4-2075mm (with IZE doubler)		10.6-1015mm		15-800mm	
	Zoom	No Optical Zoom, 16X Digital		135X Optical Zoom, 4X Digital		95X Optical Zoom + 16X Digital		53X Optical Zoom + 16X Digital	
	Angle of View	0.21° Horizontal (0.03° with 8X Digital Zoom)		27°-0.2° Horizontal (0.05° with 4X Digital Zoom)		42.0°-0.43° Horizontal (0.05° with 8X Digital Zoom)		28.7°-0.55° Horizontal (0.07° with 8X Digital Zoom)	
	Focus	Manual		Auto / Manual		Auto / Manual		Auto / Manual	
Minimum Illumination		Color: 0.03 Lux @ f/1.2; B&W: 0.003 Lux @ f/1.2		Color: 0.006 Lux @ f/1.2; B&W: 0.0006 Lux @ f/1.2		Color: 0.1 Lux @ f/2.1; B&W: 0.01 Lux @ f/2.1		Color: 0.1 Lux @ f/1.5; B&W: 0.01 Lux @ f/1.5	
Optical Fog Filter (NIR)		Yes		Yes		Yes		Yes	
Heatwave Mitigation		No		No		Yes		Yes	
NDAA Compliant		Yes		Yes		No		Yes	
Video Network	Compression	H.265/H.264/MJPEG							
	Protocol	ONVIF, HTTP, RTSP, RTP, TCP, UDP							
Image Stabilization		Electronic Image Stabilization (EIS)							
Image Enhancements		AWB, BLC, WDR, DNR		Auto White Balance, 120dB WDR, 3D DNR, BLC		White Balance, 100dB WDR, 2D/3D DNR, BLC, HLC, Digital Defog		White Balance, 100dB WDR, 2D/3D DNR, BLC, HLC, Digital Defog	
Edge Storage		Supports MicroSD Card up to 256GB							

*Lens measurements and angle of view are accurate to ±10% due to back focus distances, sensor sizes, lens manufacturing, etc.

ZLID™ Illumination Options

	500m IR LED		1km ZLID		1.5km ZLID		2km ZLID		3km ZLID		4km ZLID		5km ZLID		6km ZLID	
Illumination Distance	500m		1000m		1500m		2000m		3000m		4000m		5000m		6000m	
Wavelength	808nm		808nm	940nm	808nm	940nm	808nm	940nm	808nm	940nm	808nm	940nm	808nm	940nm	808nm	940nm
NOHD	0m (eye safe)		50m	36.6m	56.4m	45.2m	226m	166m	238m	266m	555m	376m	752m			

WWW.INFINITIOPTICS.COM
1-866-969-6463
INFO@INFINITIOPTICS.COM

VEGA

Thermal Camera Options



SD Thermal Camera Options

	31-310mm (-310TIZ)			38-875mm (-875CTZ)			46-1100mm (-1100CTZ)			85-1400mm (-1400CTZ)		
Image Sensor	Uncooled VOx Microbolometer, 30Hz			High Sensitivity Cooled InSb or MCT, 30Hz								
Resolution	640×512 pixels (1280×1024 optional)			640×480 pixels (NTSC) / 640×512 pixels (PAL)								
Pixel Pitch	12µm (40% further range than 17µm sensors)			15µm								
Lens	31-310mm f/1.3 Motorized Zoom			38-875mm f/5.5 Motorized Zoom			46-1100mm f/5.5 Motorized Zoom			85-1400mm f/5.5 Motorized Zoom		
Focus	Motorized Autofocus			Motorized Autofocus			Motorized Autofocus			Motorized Autofocus		
Field of View	14.1°-1.42° HFOV (27.8°-2.84° HD)			14°-0.63° Horizontal FOV			11.9°-0.5° Horizontal FOV			6.4°-0.39° Horizontal FOV		
Pixels Per Meter @ 1km	26ppm			58ppm			73ppm			93ppm		
Human DRI Ratings*	12.2 km	4.0 km	2.0 km	27.6 km	9.2 km	4.6 km	34.7 km	11.6 km	5.8 km	44.2 km	14.7 km	7.3 km
Vehicle DRI Ratings*	29.7 km	9.9 km	4.9 km	55+ km	22.3 km	11.1 km	55+ km	28.1 km	14.0 km	55+ km	35.7 km	17.8 km
Image Optimizations	DICE, BPR, NUC, & AGC user configurable via SDK, GUI											
Digital Zoom	2X & 4X dynamic zoom/pan with range switching											
Spectral Range	LWIR (7,000-14,000nm)			MWIR (3,000-5,000nm)								
Thermal Sensitivity	50mK			20-25mK								
Cooler Lifetime	Uncooled Maintenance-Free			20,000 Hour Rated MTBF								
Image Display Modes	White Hot, other color palettes available upon request											

HD Thermal Camera Options

	30-460mm HD (-460CTZ-HD)			60-705mm HD (-705CTZ-HD)			73-915mm HD (-915CTZ-HD)			100-1215mm HD (-1215CTZ-HD)		
Image Sensor	High-Sensitivity Cooled InSb or X-Hot Detector, 30Hz											
Resolution	1280×1024 pixels											
Pixel Pitch	10µm (50% further range than 15µm sensors)											
Lens	30-460mm f/4.0 Motorized Zoom			60-705mm f/4.0 Motorized Zoom			73-915mm f/4.0 Motorized Zoom			100-1215mm f/4.0 Motorized Zoom		
Focus	Motorized Autofocus			Motorized Autofocus			Motorized Autofocus			Motorized Autofocus		
Field of View	24.1-1.59° Horizontal FOV			12.1-1.04° Horizontal FOV			10.0-0.8° Horizontal FOV			7.3-0.6° Horizontal FOV		
Pixels Per Meter @ 1km	46ppm			70.5ppm			91.5ppm			121ppm		
Human DRI Ratings*	21.8 km	7.2 km	3.6 km	33.4 km	11.1 km	5.5 km	43.4 km	14.4 km	7.2 km	55+ km	19.2 km	9.6 km
Vehicle DRI Ratings*	52.9 km	17.6 km	8.8 km	55+ km	27.0 km	13.5 km	55+ km	35.0 km	17.5 km	55+ km	46.5 km	23.2 km
Special Features	Digital Image Contrast Enhancement (DICE), Thermally Compensated Optics (TCO)											
Digital Zoom	4X Digital Zoom (16X optional)											
Spectral Range	3,000-5,000nm (MWIR)											
Thermal Sensitivity	20-25mK											
Cooler Lifetime	20,000 Hour Rated MTBF (InSb) / 30,000 Hour Rated MTBF (X-Hot)											

* **D R I** DRI detection ratings are based on industry-wide standards (Johnson's Criteria) that can be misleading if not properly understood. For more information, please see our whitepaper about understanding DRI measurements at: www.infiniti optics.com/dri

Other Specifications

Optional LRF	LRF4	LRF7	LRF20	LRF21	LRF25	LRF30
Extended Range	4.2km	7.1km	20km	21km	25km	30km
Range to NATO Vehicle*	3.5km	6km	8km	10km	12km	18km
Range to Human*	2km	3.8km	4km	5km	6km	9km
Wavelength	1530nm (±5)					
Precision**	0.1-1.5m		0.2-2.5m			

*Range performance is dependent on distance and target reflectivity. Calculated using NATO Vehicle size of 2.3×2.3m, Human size of 0.5×1.8m, with target visibility 25km, maximum measuring time, target reflectivity 30%, detection probability 90%. Depending on received signal level. Up to three (3) targets: First, Second and Third. See our LRF brochure for more information **LRF accuracy is based on ideal conditions. See our LRF brochure for more information.

Pan/Tilt Mechanical	with 1400mm Thermal System		with Smaller Thermal System
Drive System	Elliptical Synchronous Drive, Low to Zero Backlash		
Pan Angle	Endless 360°		Endless 360°
Pan Speed	0.001°/s – 40°/s (0.001-100°/s optional, speeds may differ depending on configuration/gyro)		0.001°/s – 60°/s (speeds may differ depending on configuration/gyro)
Tilt Angle	+45° to -45° (up to +90° to -90° optional)		+65° to -65° (+90° to -90° optional)
Tilt Speed	0.001°/s – 40°/s (0.001-100°/s optional, speeds may differ depending on configuration/gyro)		0.001°/s – 60°/s (speeds may differ depending on configuration/gyro)
Proportional Pan/Tilt	Auto adjusts pan/tilt speed based on zoom level		
Accuracy	0.02°		
Encoder Resolution	0.00036° Magnetic Encoder absolute positioning		
Gyro Stabilization	0.15° (with balanced payload, higher precision optional, precision may be lower at high pan/tilt speeds)		
Physical			
Construction	High Strength Aluminum Alloy with Anti-Corrosion Finish		
Payload Capacity	50kg		
Environmental			
Operational Temperature	-50°C to +65°C (with heater, -20°C without heater), Humidity: 90%±3% RH		
Environmental	Designed to meet or exceed MIL-STD-810F, EMI MIL-STD-461E, IP66/67		
Electrical			
Input Voltage	36-70VDC, 48VDC preferred; 220VAC Adapter Included		
Power Consumption	500W Max (Before cooling options)		

Optional Features: Wiper and Washer for Visible, LRF (Laser Rangefinder), Wide-Angle 4K Spotter Camera, Wide-Angle Thermal Spotter Camera, Military GPS, Reflective Paint or Customized Paint Finish, Joystick (Pelco-D or IP 3-axis joysticks), Wireless Analog or IP Radios P2P or mesh

Brochure specifications subject to change.

VEGA

Additional Images



WWW.INFINITIOPTICS.COM

1-866-969-6463

INFO@INFINITIOPTICS.COM